



# TYLA

design: Roberto Mantovani




**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**350mA** (V<sub>i</sub> 2.9V)

**Power**  
 Pouissance  
 Potencia  
**1W**



## Photometric diagrams

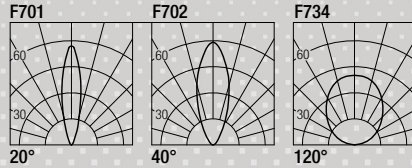

CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	100 lm	93
4200K	107 lm	93

## Code Construction

Construction du code produit  
 Construcción del código de producto


TY<sub>i</sub>X<sub>i</sub>X<sub>i</sub>XX<sub>i</sub>X<sub>i</sub>

TY	X	Shape	X	Beam angle	XX	Color Temp.	X	Finishing
		Forma Forme		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color		Finitions Acabados
	<b>1</b>	Round Rond Redondo	<b>1</b>	20°		<b>27</b> 2700K		<b>G</b> Grey Gris
	<b>2</b>	Square Carré Cuadrado	<b>2</b>	40°		<b>30</b> 3000K		<b>N</b> Black Noir Negro
			<b>9</b>	120°		<b>35</b> 3500K		<b>K</b> COR-TEN
						<b>42</b> 4200K		<b>Z</b> INOX AISI 316L Steel Acier Acero
						<b>CU</b> Custom		

## Optionals - Accessoires - Accesorios


### CSTY01

**Recessing box**  
 Boîtier d'encastrement  
 Caja de empotrar



### CSTY01-RAB

**Recessing box + RAB Housing**




**Note:** cable cut to measure on request  
**Note:** câble sur mesure disponible sur demande  
**Nota:** cable a medida disponible a petición

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



0-10V

### FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
**Min. 1/Max. 18 Fixtures per Driver**

Phase

### FLEXA-12-350-CC-ELV

12W 350mA Constant Current  
 Dimming Range: 10%  
**Min. 2/Max. 7 Fixtures per Driver**

### FLEXA-16-350-CC-ELV

16W 350mA Constant Current  
 Dimming Range: 10%  
**Min. 7/Max. 14 Fixtures per Driver**

Lutron 2-Wire Phase

### LTEA.1

Hi-Lume 2-Wire Phase  
 350mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 6 Fixtures per Driver**

### LTEA.2

Hi-Lume 2-Wire Phase  
 350mA Constant Current  
 Dimming Range: 1%  
**Min. 6/Max. 13 Fixtures per Driver**

Lutron Ecosystem

### LDE.1

Hi-Lume Ecosystem  
 350mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 10 Fixtures per Driver**

### LDE.2

Hi-Lume Ecosystem Premier  
 350mA Constant Current  
 Dimming Range: 1%  
**Min. 11/Max. 16 Fixtures per Driver**