


PROJECT: _____

TYPE: _____ DATE: _____

NOTES: _____

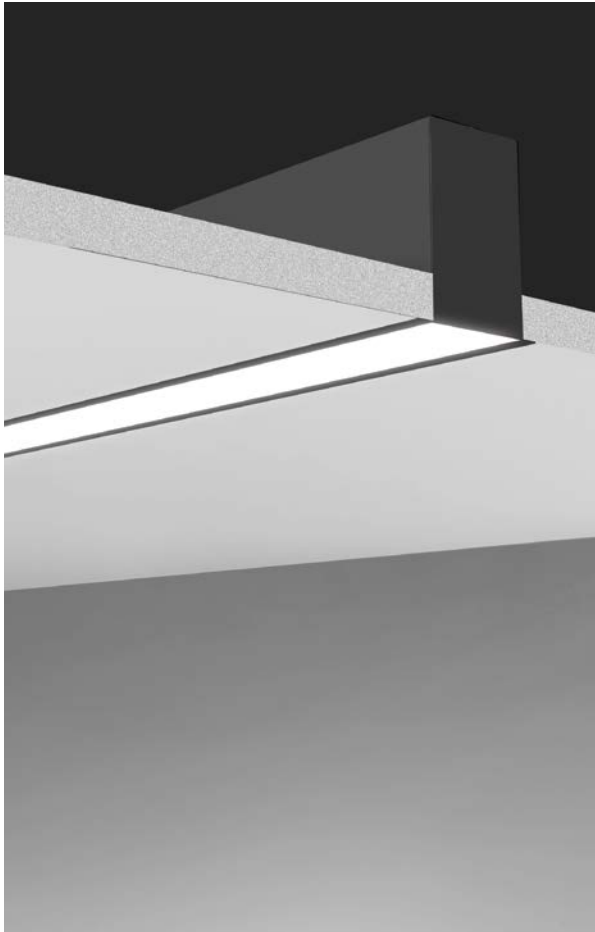

MODEL F50	F50-R-X-OP-S-DN
DIMENSION	50mm x 75mm
MOUNTING	Recessed Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL APPROVAL




COMPLIANT

WARRANTY



PATTERNS

Common Miter Cut Patterns




Custom Patterns



All corners are miter cut and customizable to any degree.

Contact sales@eurofase.com

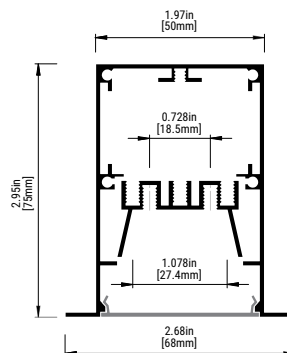

ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.)			LENS	STYLE	LIGHT DIRECTION			
			(**See Lengths Chart below)								
F50	R	RECESSED	1	2	3	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			4	5	6						
			7	8							
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Recessed / 6 ft. / Opal Lens / Standard Style / Downlight / 3000K / Standard / Universal Voltage / TRIAC Dimming / Aluminum Finish

CODE: **F50-R-6-OP-S-DN-30-ST-UN-TRI-AL**

**LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE



ARCHITECTURAL PROFILES

TECHNICAL SPECIFICATIONS


OS1	1% Dimming (0-10V)
TRI	TRIAC Dimmable LED Driver
TW	Tuneable White (1500K-6500K)
HL1	Lutron HI-LUME 1% 2-wire LED Driver
ES	Lutron Digital Ecosystem
5ES	5 Series Ecosystem; 5% Dimming
DTW	Dim To Warm

MODEL	Samsung Breakaway 44 inch
POWER CONSUMPTION	31W
LUMINOUS FLUX	Standard: 4185lm @ 3500K High: 4650lm @ 3500K
LUMINOUS EFFICACY	Standard: 135lm/W High: 150lm/W


WIRE FEED: SUSPENSION

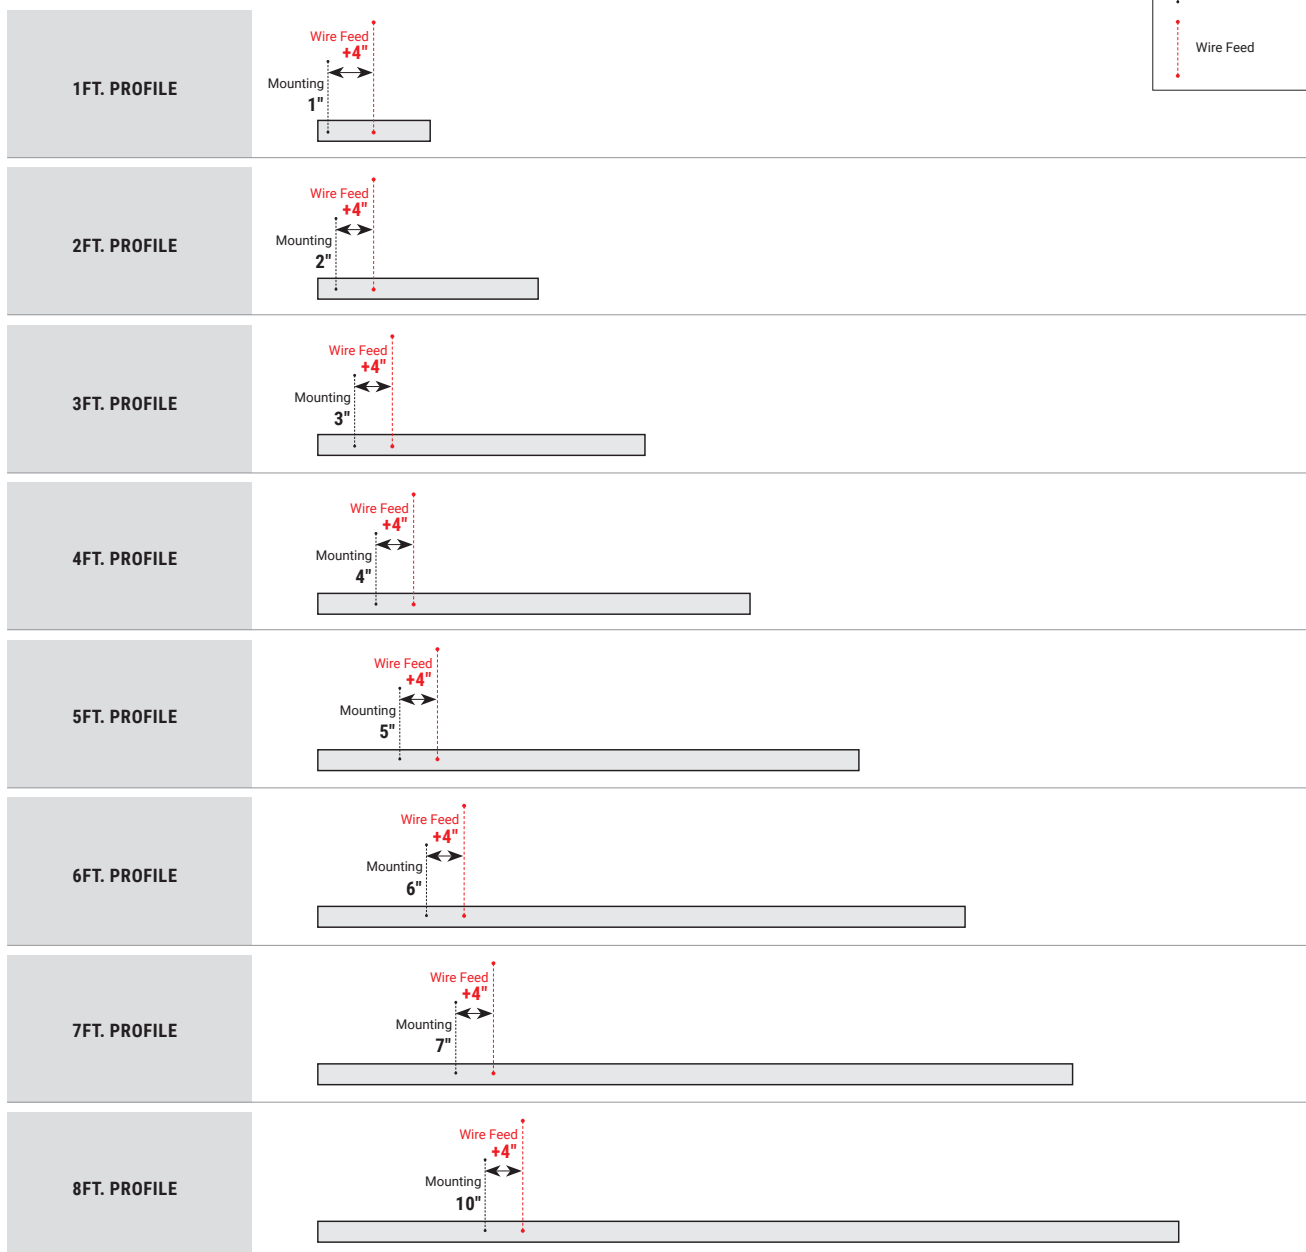


ARCHITECTURAL PROFILES
WIRE FEED: SURFACE MOUNT




1FT. PROFILE



2FT. PROFILE



3FT. PROFILE



4FT. PROFILE




5FT. PROFILE



6FT. PROFILE



7FT. PROFILE

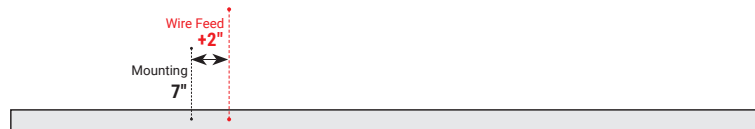


8FT. PROFILE




ARCHITECTURAL PROFILES


WIRE FEED: WALL MOUNT




1FT. PROFILE




2FT. PROFILE



3FT. PROFILE




4FT. PROFILE

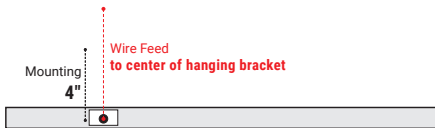

5FT. PROFILE




6FT. PROFILE

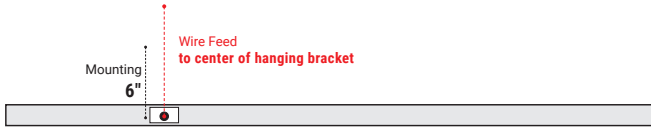

7FT. PROFILE




8FT. PROFILE

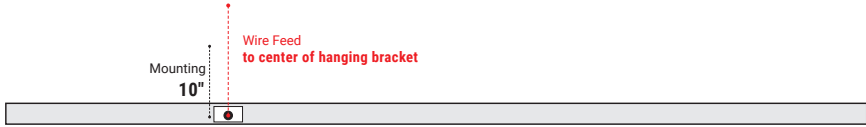

ARCHITECTURAL PROFILES

ETCH A SKETCH

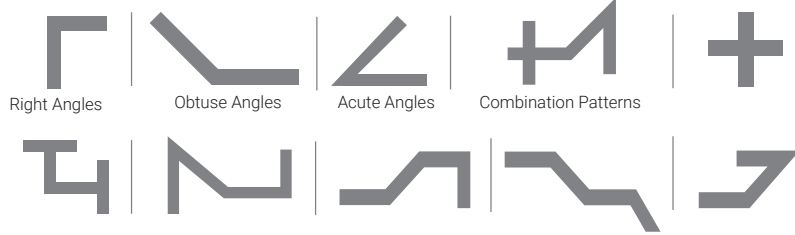

PATTERNS	
S - X	Square
R - XY	Rectangle
U - XYZ	U-Shape
L - XY	L-Shape
C	Custom Pattern
Standard Patterns Minimal Lengths	
<p>Square</p> <p>X = 23" min. Y = 23" min.</p>	<p>Rectangle</p> <p>X = 23" min. Y = 23" min. Z = 23" min.</p>
<p>U-Shape</p> <p>X = 23" min. Y = 23" min. Z = 23" min.</p>	<p>L-Shape</p> <p>X = 23" min. Y = 23" min.</p>
Custom Patterns	
<p>"T"</p>	<p>"X"</p>
Corner All corners are miter cut and customizable to any degree.	

