

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_




MODEL F50	F50-S-X-OP-S-DN
DIMENSIONS	50mm x 75mm
MOUNTING	Surface Mount
STYLE	Standard
KELVIN	2700K*/3000K/3500K/4000K*/5000K*
LENGTHS	1 - 8' / CR: Continuous Run / PAT: Pattern
LENS	Opal/Opal Dropped
LIGHT DIRECTION	Downlight
LUMEN PACKAGES	Standard: 7.5W, 813lm/ft. (3500K) / High: 10W, 1162lm/ft. (3500K)
VOLTAGE	120V-277V/347V*
DIMMING	0-10V/TRIAC/Tuneable White*/Lutron*/Dim To Warm*
FINISHES	Black/White/Aluminum/Customization* (Require RAL#)
APPROVAL	Damp

ELECTRICAL APPROVAL




COMPLIANT

WARRANTY

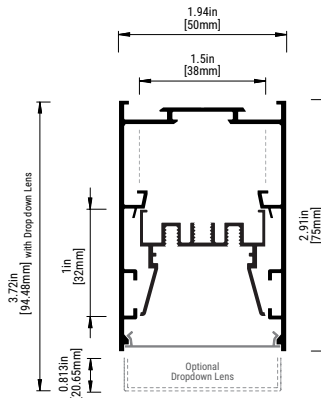

### PATTERNS

#### Common Miter Cut Patterns



#### Custom Patterns



All corners are miter cut and customizable to any degree.

Contact [sales@eurofase.com](mailto:sales@eurofase.com)

## ORDERING GUIDE CONFIGURATOR

PROFILE	MOUNTING		LENGTHS (FT.)			LENS	STYLE		LIGHT DIRECTION		
			1	2	3						
F50	S	SURFACE MOUNT	4	5	6	OP	OPAL	S	STANDARD	DN	DOWNLIGHT
			7	8	OD	OPAL DROPPED					
			CR	CONTINUOUS RUN							
			PAT	PATTERN							

CCT		LUMEN PACKAGE		VOLTAGE		DIMMING OPTIONS		FINISHES	
27	2700K	ST	STANDARD	UN	UNIVERSAL (120V - 277V)	OS1	0-10V DIMMING	01	BLACK
30	3000K	HI	HIGH	347	347V*	TRI	TRIAC	02	WHITE
35	3500K					TUN	TUNABLE WHITE*	AL	ALUMINUM
40	4000K					LUT	LUTRON*		CUSTOM COLOR
50	5000K					DTW	DIM TO WARM*	CC	SPECIFY RAL#

#### ORDERING GUIDE EXAMPLE:

Architectural Profiles F50 / Surface Mount / 1 ft. / Opal Dropped / Standard Style / Downlight / 4000K / High / Universal Voltage / 0-10V Dimming / Black Finish

CODE: **F50-S-1-OP-S-DN-40-HI-UN-OS1-01**

#### \*\*LENGTHS CHART

1'	11.5"	2'	22.5"	3'	33.5"	4'	44.5"
5'	55.5"	6'	66.5"	7'	77.5"	8'	88.5"

MAXIMUM 8' PER CONTINUOUS PIECE



# ARCHITECTURAL PROFILES

## TECHNICAL SPECIFICATIONS


<b>OS1</b>	1% Dimming (0-10V)
<b>TRI</b>	TRIAC Dimmable LED Driver
<b>TW</b>	Tuneable White (1500K-6500K)
<b>HL1</b>	Lutron HI-LUME 1% 2-wire LED Driver
<b>ES</b>	Lutron Digital Ecosystem
<b>5ES</b>	5 Series Ecosystem; 5% Dimming
<b>DTW</b>	Dim To Warm

<b>MODEL</b>	Samsung Breakaway 44 inch
<b>POWER CONSUMPTION</b>	31W
<b>LUMINOUS FLUX</b>	<b>Standard:</b> 4185lm @ 3500K <b>High:</b> 4650lm @ 3500K
<b>LUMINOUS EFFICACY</b>	<b>Standard:</b> 135lm/W <b>High:</b> 150lm/W


### WIRE FEED: SUSPENSION

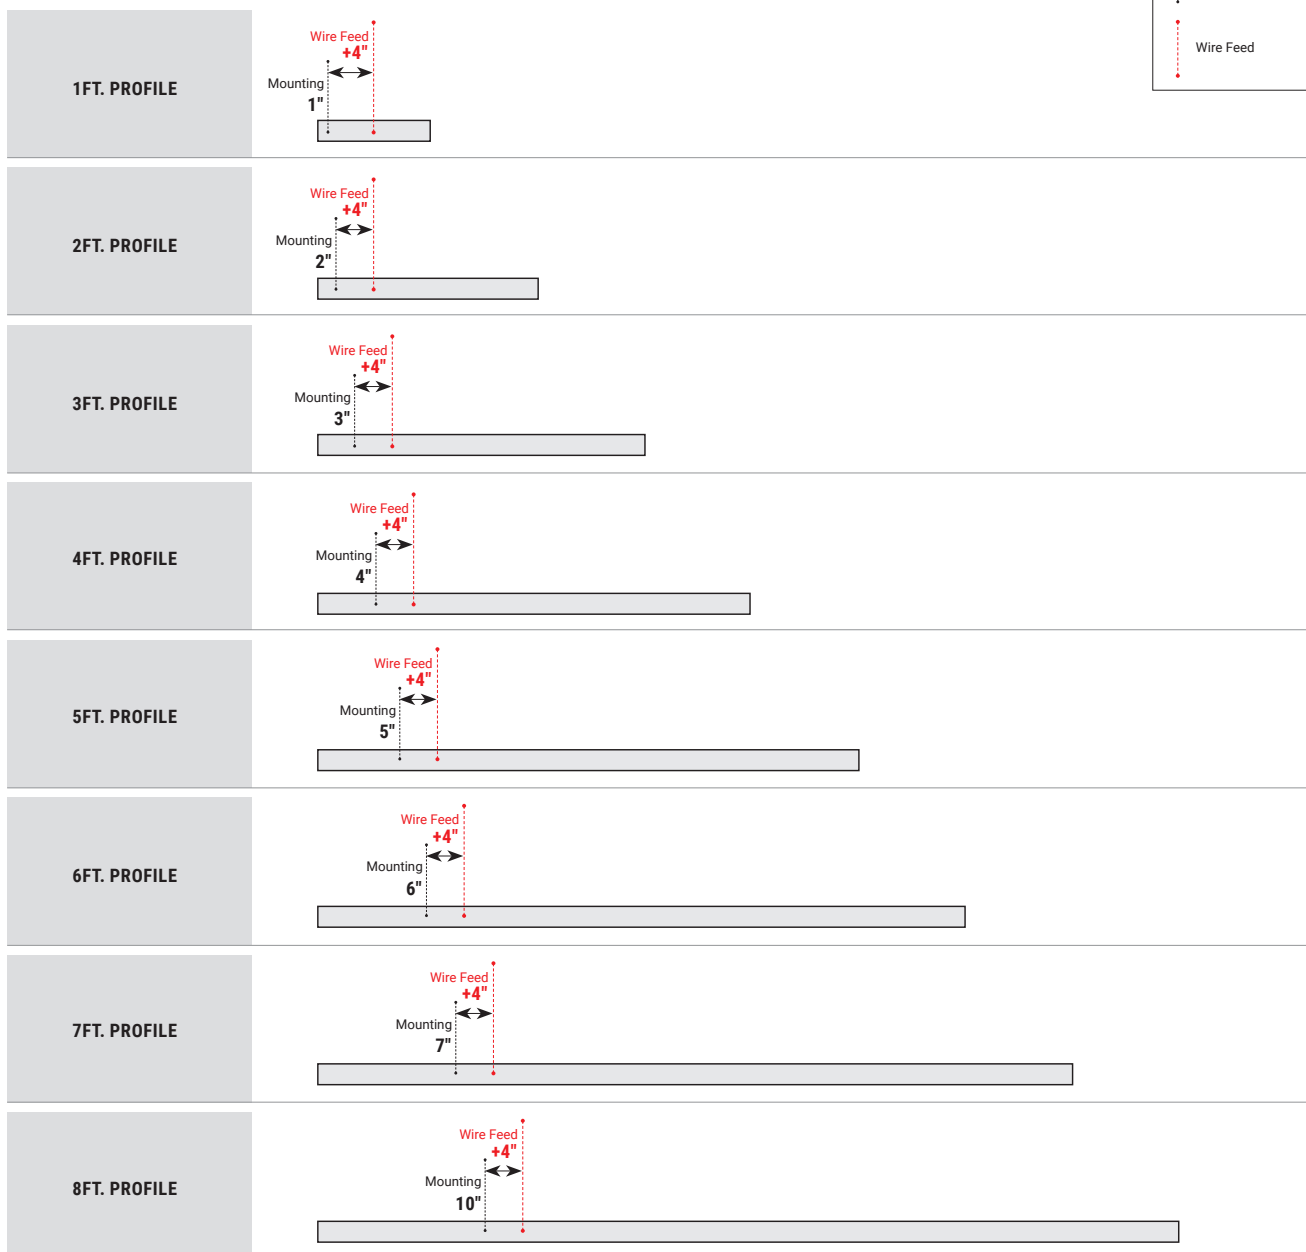


ARCHITECTURAL PROFILES  
WIRE FEED: SURFACE MOUNT




1FT. PROFILE




2FT. PROFILE



3FT. PROFILE




4FT. PROFILE

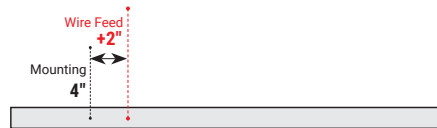


5FT. PROFILE



6FT. PROFILE

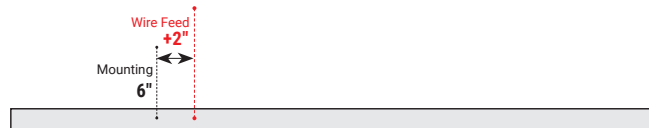

7FT. PROFILE

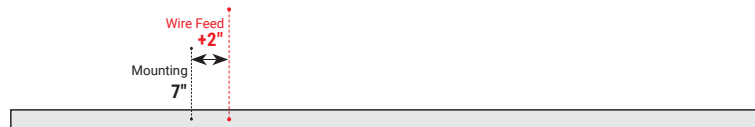

8FT. PROFILE




ARCHITECTURAL PROFILES

WIRE FEED: WALL MOUNT




1FT. PROFILE




2FT. PROFILE



3FT. PROFILE



4FT. PROFILE

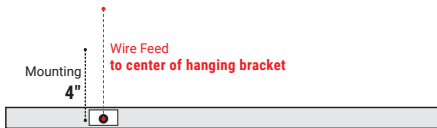

5FT. PROFILE




6FT. PROFILE



7FT. PROFILE




8FT. PROFILE

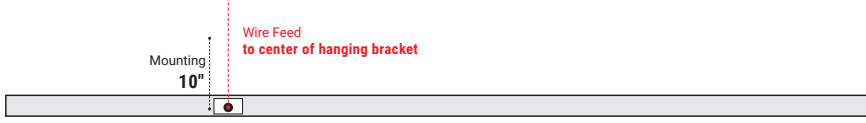

ARCHITECTURAL PROFILES

ETCH A SKETCH

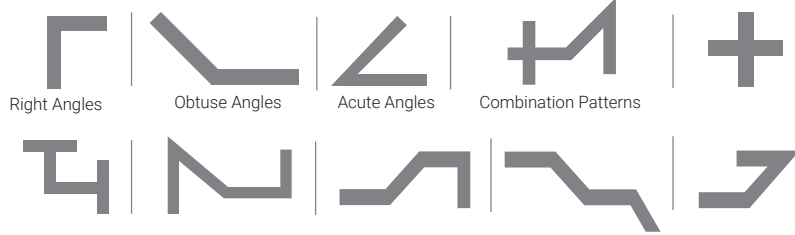

PATTERNS	
<b>S - X</b>	Square
<b>R - XY</b>	Rectangle
<b>U - XYZ</b>	U-Shape
<b>L - XY</b>	L-Shape
<b>C</b>	Custom Pattern
<b>Standard Patterns Minimal Lengths</b>	
<p>Square</p> <p>X = 23" min. Y = 23" min.</p>	<p>Rectangle</p> <p>X = 23" min. Y = 23" min. Z = 23" min.</p>
<p>U-Shape</p> <p>X = 23" min. Y = 23" min. Z = 23" min.</p>	<p>L-Shape</p> <p>X = 23" min. Y = 23" min.</p>
<b>Custom Patterns</b>	
<p>"T"</p>	<p>"X"</p>
<b>Corner</b> All corners are miter cut and customizable to any degree.	

