


# RAÙL 10 TRIMLESS


design: Lapo Grassellini

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>I</sub> 18V)**

**Power**  
 Pouissance  
 Potencia  
**10W**

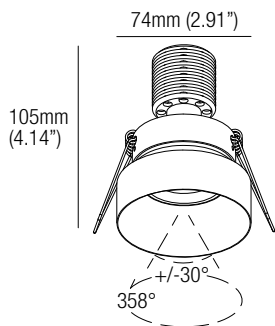

## Photometric diagrams

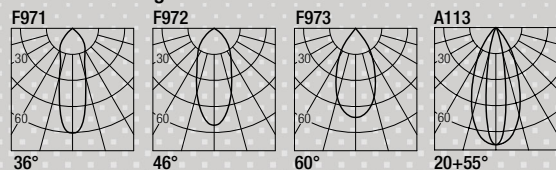

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

## Code Construction

Construction du code produit  
 Construcción del código de producto

**RT1 | X | XX | 9 | X |**


RT1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 46°
				<b>35</b> 3500K			<b>W</b> 60°
				<b>40</b> 4000K			<b>D</b> 20+55°
			<b>DW</b> Dim Warm † @ 420mA				

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



## 0-10V

**FLEXA-60-PRO-CC-10V**  
 Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
**Min. 1/Max. 3 Fixtures per Driver**

## Phase

**FLEXA-12-500-CC-ELV**  
 12W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 1/Max. 1 Fixtures per Driver**

**FLEXA-23-500-CC-ELV**  
 23W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 2/Max. 2 Fixtures per Driver**

## Lutron 2-Wire Phase

**LTEA.2**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 2 Fixtures per Driver**


**LTEA.3**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 3 Fixtures per Driver**

## Lutron Ecosystem

**LDE.1**  
 Hi-Lume Ecosystem  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 1 Fixtures per Driver**


**LDE.2**  
 Hi-Lume Ecosystem Premier  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 2 Fixtures per Driver**

**MP-R090**  
 Mounting Plate  
 with 90mm Hole

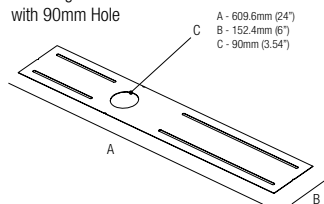

## T-BAR Installation


**R01090**  
 Mounting Plate  
 with 90mm Hole

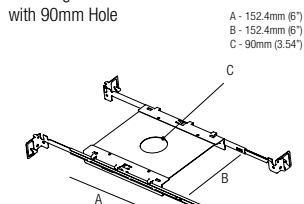

## IC Housings

**IC064R01090**  
 Recessed Box for  
 Insulated Ceiling with  
 90mm Hole


**AT064R01090**  
 Air Tight Recessed Box  
 for Insulated Ceiling with  
 90mm Hole

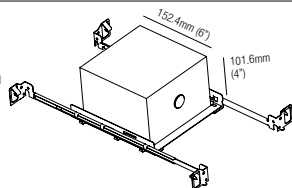

## Accessories - Accessoires - Accesorios

### MQC003

**Plasterboard  
 recessing frame**  
 Boîtier d'encastrement  
 pour plaques de plâtre  
 Cajetín para placas  
 de yeso



**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia

**LOH1**  
 White  
 Blanc  
 Blanco

**LOH1B**  
 Black  
 Noir  
 Negro

