


SELENE


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V, 2.9V)

Power
 Poissance
 Potencia
1.5W

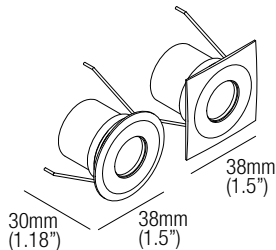

Photometric diagrams

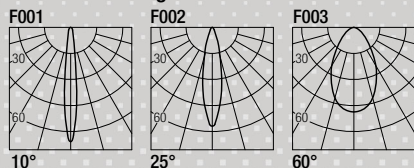

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4200K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto


SP | X | X | X | XX |

SP	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
	1	Round Rond Redondo	1	White Blanc Blanco	0	10°	27	2700K
	2	Square Carré Cuadrado	2	Aluminum Aluminium Aluminio	1	25°	30	3000K
			3	Chrome Cromo	2	60°	35	3500K
			4	Gold Or Oro			42	4200K
			5	Black Noir Negro			CU	Custom
			6	Bronze Bronce				
			9	INOX AISI 316L Steel Acier Acero				

Drivers

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min. 7/Max. 14 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.1

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 6 Fixtures per Driver

LTEA.2

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 6/Max. 13 Fixtures per Driver

Lutron Ecosystem


LDE.1

Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 10 Fixtures per Driver

LDE.2


Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 11/Max. 16 Fixtures per Driver

MP-R030
 Mounting Plate
 with 30mm Hole

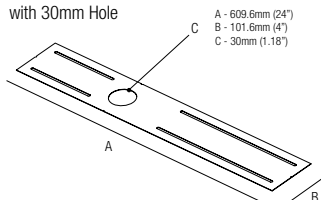

T-BAR Installation


RO1030
 Mounting Plate
 with 30mm Hole

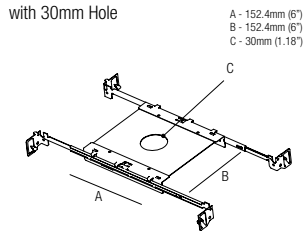

IC Housings

IC064R01030
 Recessed Box for
 Insulated Ceiling with
 30mm Hole


AT064R01030
 Air Tight Recessed Box
 for Insulated Ceiling with
 30mm Hole

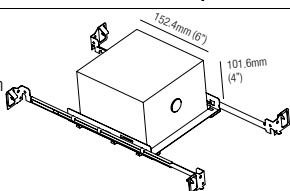

Optionals - Accessoires - Accesorios

CS1001

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CS1006

Recessing box
 Boîtier d'encastrement
 Caja de empotrar

