

# BUSSOLED

SUSPENSION

TYPE:

PROJECT NAME:



 **BUSSOLED**  
Registered design

SMALL

LARGE

Design: Serge Cornelissen

*Bussolo reinvents itself, meets elegance and becomes Bussoled. Available in two different sizes and in multiple configurations, this hanging luminaire has a housing made from epoxy powder coated finish aluminum stabilized with UV rays and it is equipped with a Chip On Board technology high efficiency LED light source. Complete with cables for suspension in galvanized steel with a 1.2 mm diameter, 200 cm of electrical cable and ceiling attachment in paint-ed steel. Driver included, when necessary. Dimmable version available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP40.*

SPECIFICATION SHEET

 **LEDOLOGY®**

WWW.LEDOLOGY.COM

A **Luminart** BRAND

# BUSSOLED

## SUSPENSION

TYPE:



PROJECT NAME:


### BUSSOLED SMALL - SCREEN

code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258630.25...</b>	25	3530	110°	75.000h	L80/B10
<b>L258630.37...</b>	37	5165	110°	75.000h	L80/B10




/DIMM2 DALI  
/DIMM3 0-10V

SL	 LED
AL	included
	(see table)
TC	.30 per 3000K / .40 per 4000K
IP	40
CRI	>80 (CRI93 and CRI97 on request)
SDCM	3
EEL	A++
RG	1
02	Matt black
08	Frosted white

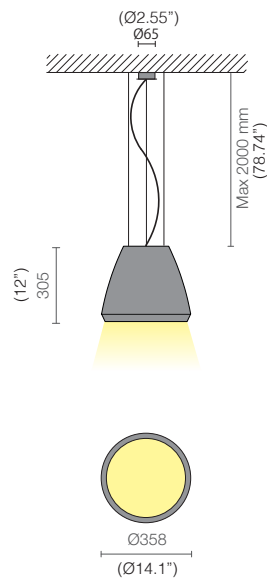

### BUSSOLED SMALL - LENS

codice	W	Lm (3000K)	 Frosted white	lifetime	
<b>8632.25...</b>	25	3530	95°	75.000h	L80/B10
<b>8632.37...</b>	37	5165	95°	75.000h	L80/B10



/DIMM2 DALI  
/DIMM3 0-10V

SPECIFICATION SHEET

# BUSSOLED

## SUSPENSION

TYPE:

PROJECT NAME:


### BUSSOLED SMALL - REFLECTOR

code	W	Lm (3000K)	 Frosted white	lifetime		
<b>L258635.25...</b>	25	3530	50°*	75.000h	L80/B10	
<b>L258635.37...</b>	37	5165	50°*	75.000h	L80/B10	

/DIMM2 DALI

/DIMM3 0-10V

\*25° on request

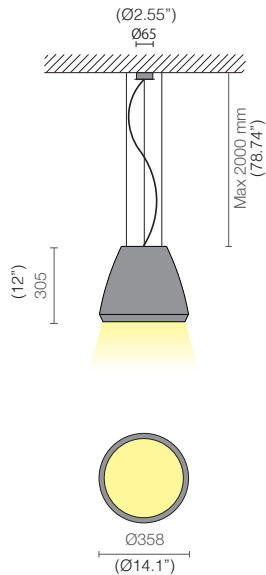

SPECIFICATION SHEET


# BUSSOLED

## SUSPENSION

TYPE:



PROJECT NAME:


### BUSSOLED SMALL - SCREEN

code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258633.25...</b>	25	3530	85°	75.000h	L80/B10
<b>L258633.37...</b>	37	5165	85°	75.000h	L80/B10




/DIMM2 DALI  
/DIMM3 0-10V

- SL  LED
- AL *included*
-  *(see table)*
- TC .30 per 3000K / .40 per 4000K
- IP 40
- CRI >80 (*CRI93 and CRI97 on request*)
- SDCM 3
- EEI A++
- RG 1
- 08 08 *Frosted white - Frosted white*
- 08 13 *Frosted white - Gold*
- 02 08 *Black - Frosted white*
- 02 13 *Black - Gold*

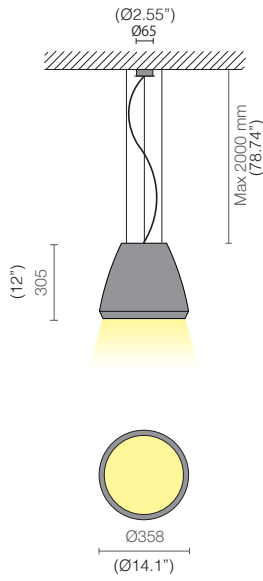

### BUSSOLED SMALL - LENS

code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258634.25...</b>	25	3530	85°	75.000h	L80/B10
<b>L258634.37...</b>	37	5165	85°	75.000h	L80/B10



/DIMM2 DALI  
/DIMM3 0-10V

SPECIFICATION SHEET



# BUSSOLED

## SUSPENSION

TYPE:

PROJECT NAME:


### BUSSOLED SMALL - REFLECTOR

code	W	Lm (3000K)	 Frosted white	lifetime		
<b>L258636.25...</b>	25	3530	50°*	75.000h	L80/B10	
<b>L258636.37...</b>	37	5165	50°*	75.000h	L80/B10	

/DIMM2 DALI

/DIMM3 0-10V

\*25° on request

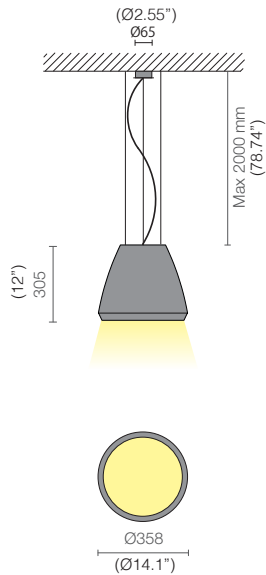

SPECIFICATION SHEET

# BUSSOLED

## SUSPENSION

TYPE:



PROJECT NAME:

### BUSSOLED LARGE - SCREEN


code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258640.25...</b>	25	3530	110°	75.000h	L80/B10
<b>L258640.37...</b>	37	5165	110°	75.000h	L80/B10




/DIMM2 DALI  
/DIMM3 0-10V

SL	 LED
AL	included
	(see table)
TC	.30 per 3000K / .40 per 4000K
IP	40
CRI	>80 (CRI93 and *CRI97 on request)
SDCM	3
EEL	A++
RG	1
02	Matt black
08	Frosted white

\*50W excluded

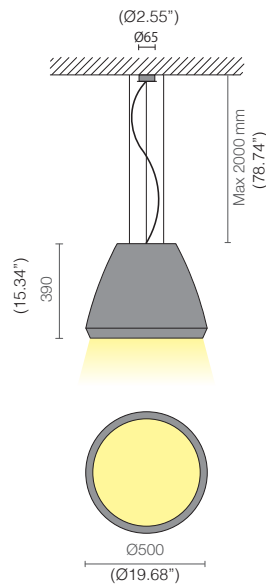

### BUSSOLED LARGE - LENS

code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258642.25...</b>	25	3530	95°	75.000h	L80/B10
<b>L258642.37...</b>	37	5165	95°	75.000h	L80/B10
<b>L258642.50...</b>	50	7215	95°	60.000h	L80/B10



/DIMM2 DALI  
/DIMM3 0-10V

SPECIFICATION SHEET



# BUSSOLED

## SUSPENSION

TYPE:

PROJECT NAME:


### BUSSOLED LARGE - REFLECTOR

code	W	Lm (3000K)	 Frosted white	lifetime		
<b>L258645.25...</b>	25	3530	50°*	75.000h	L80/B10	
<b>L258645.37...</b>	37	5165	50°*	75.000h	L80/B10	
<b>L258645.50...</b>	50	7215	50°*	60.000h	L80/B10	

/DIMM2 DALI

/DIMM3 0-10V

\*25° on request

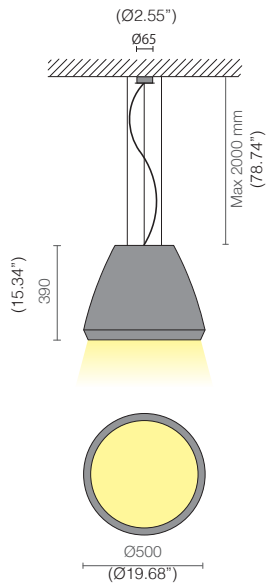

SPECIFICATION SHEET

 LEDODOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM


# BUSSOLED

## SUSPENSION

TYPE:



PROJECT NAME:

### BUSSOLED LARGE - SCREEN


code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258643.25...</b>	25	3530	85°	75.000h	L80/B10
<b>L258643.37...</b>	37	5165	85°	75.000h	L80/B10




/DIMM2 DALI  
/DIMM3 0-10V

SL	 LED
AL	included
	(see table)
TC	.30 per 3000K / .40 per 4000K
IP	40
CRI	>80 (CRI93 and *CRI97 on request)
SDCM	3
EEL	A++
RG	1
08 08	Frosted white - Frosted white
08 13	Frosted white - Gold
02 08	Black - Frosted white
02 13	Black - Gold

\*50W excluded

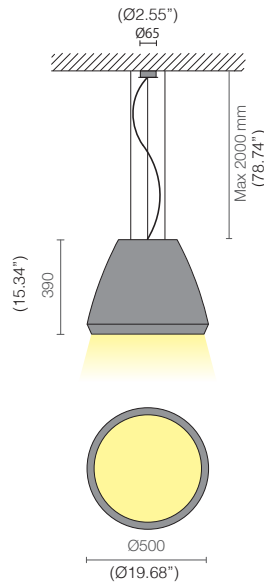

### BUSSOLED LARGE - LENS

code	W	Lm (3000K)	 Frosted white	lifetime	
<b>L258644.25...</b>	25	3530	85°	75.000h	L80/B10
<b>L258644.37...</b>	37	5165	85°	75.000h	L80/B10
<b>L258644.50...</b>	50	7215	85°	60.000h	L80/B10



/DIMM2 DALI  
/DIMM3 0-10V

SPECIFICATION SHEET





# BUSSOLED

## SUSPENSION

TYPE:

PROJECT NAME:


### BUSSOLED GRANDE - REFLECTOR

code	W	Lm (3000K)	 Frosted white	lifetime		
<b>L258646.25...</b>	25	3530	50°*	75.000h	L80/B10	
<b>L258646.37...</b>	37	5165	50°*	75.000h	L80/B10	
<b>L258646.50...</b>	50	7215	50°*	60.000h	L80/B10	

/DIMM2 DALI

/DIMM3 0-10V

\*25° on request

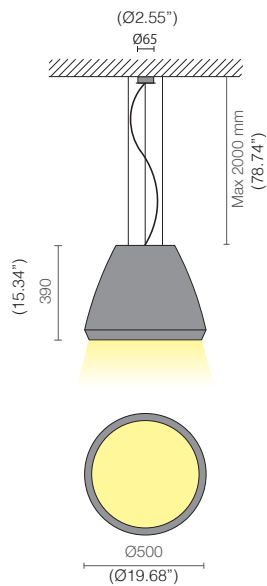

SPECIFICATION SHEET

 LEDODOLOGY®

A **Luminart** BRAND

WWW.LEDOLOGY.COM