



scala 1:1  
scale 1:1

**corpo illuminante a plafone per interni IP20.  
realizzato in estruso di alluminio ossidato di sezione H.  
il profilo è chiuso nella parte inferiore da un estruso in alluminio per facilitare il fissaggio a parete e con un diffusore estruso in policarbonato nella parte superiore.  
dimensioni: sezione 13x8mm da l.110 a l.2110mm con un passo di 100mm.  
cablato con sorgente led lineare con limitatore di corrente integrato da 3000K Ra95 13W/m,  
predisposto all'estremità con connettore amp2 femmina o maschio e femmina.  
alimentatore in tensione costante 24vdc, escluso da installare remoto.  
accessori: calamite da inserire nella gola posteriore del profilo per fissaggio su superficie metalliche.  
finiture: argento opaco.**

**IP20-rated ceiling light fitting for indoor use.  
made of oxidised extruded aluminium with H section.  
the profile is closed at the bottom with extruded aluminium to facilitate the wall mounting,  
while at the top it is closed with an extruded polycarbonate diffuser.  
size: 13x8mm section from the length of 110 to 2110mm with a pitch of 100mm.  
wired with a linear led source and an integrated 3000K Ra95 13W/m current limiter, fitted  
with a 2 amp female or male and female connector at the end.  
constant voltage 24Vdc power supply unit not included, to be installed remotely.  
accessories: magnets to be inserted in the back groove of the  
profile for mounting on metal surfaces.  
finish: matt silver.**





<b>linea di luce Ra95</b>	<b>24Vdc</b>				
---------------------------	--------------	--	--	--	--

**Vb6.250.121** linea di luce led 2700K 13W/m 1050lm/m 6000mm 0,6  
line of light

**Vb6.250.122** linea di luce led 3000K 13W/m 1050lm/m 6000mm 0,6  
line of light

**Vb6.250.123** linea di luce led 4000K 13W/m 1150lm/m 6000mm 0,6  
line of light

**Vb6.250.124** linea di luce led 5000K 13W/m 1150lm/m 6000mm 0,6  
line of light

sezionabile ogni 33,33mm  
can be cut at 33,33mm intervals

selezione macadam 3 step  
macadam selection step 3


Ra	selezione macadam macadam selection	W	lm/W	<b>classe energetica energy class</b>
95	2	1,3 - 5,2	96	<b>A+</b>
95	2	6,5 - 27,3	96	<b>A++</b>

vita media/average life 50000 h Ta 25°C/L80 - B10 - F10


**accessori. accessories.**

CE ⓘ


<b>F6.204.90</b>	pallet 13x8 estruso+policarbonato pallet extruded 13x8+polycarbonate	100pz 100pcs	0,30
<b>F9.204.80</b>	tappi di chiusura closing caps	100pz 100pcs	0,09
<b>F9.204.91</b>	cavo 2x0,5mm <sup>2</sup> cable 2x0,5mm <sup>2</sup>	l. 2000mm	0,30
	n. 2 connettori m/f amp2 n. 2 m/f amp2 connectors		
<b>F9.204.90</b>	cavo 2x0,5mm <sup>2</sup> cable 2x0,5mm <sup>2</sup>	l. 150mm	0,09
	n. 1 connettore femmina amp2 n. 1 female amp2 connector		



**esempio di installazione  
installation example**

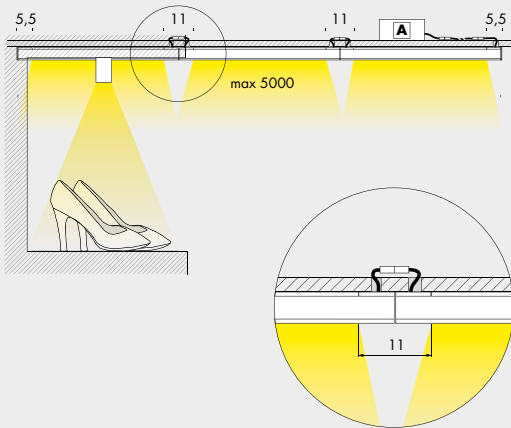

- 1** 13x8 n. 1 connettore maschio amp2  
13x8 n. 1 male amp2 connector
- 2** 13x8 n. 2 connettori m/f amp2  
13x8 n. 2 m/f amp2 connectors
- 3** tappo di chiusura incluso  
end cap included

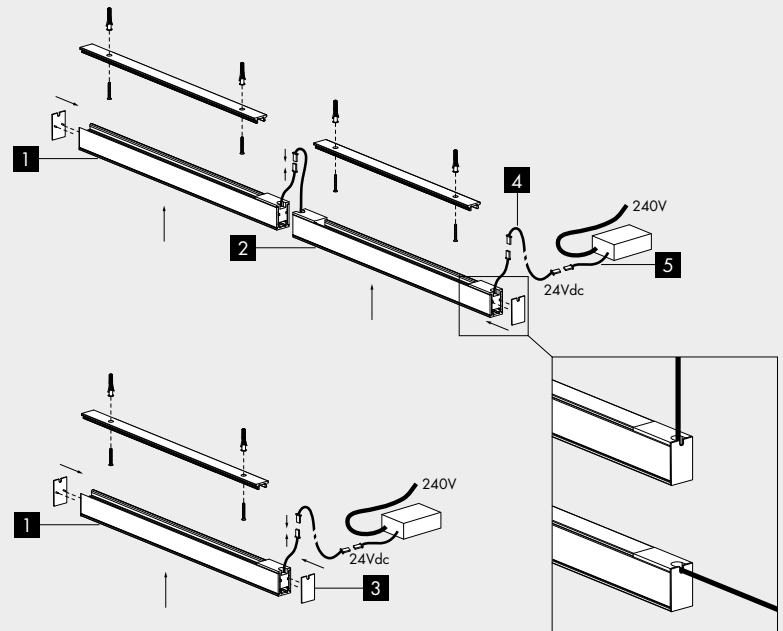

- 4** F9.204.91 cavo l. 2000mm n. 2 connettori m/f amp2  
F9.204.91 cable l. 2000mm n. 2 m/f amp2 connectors
- 5** F9.204.90 cavo l. 150mm n. 1 connettore femmina amp2  
F9.204.90 cable l. 150mm n. 1 female amp2 connector





